



POS NO	SIZE OF CONN.	PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M ³ /H
--------	---------------	---------	---------	------------------	--

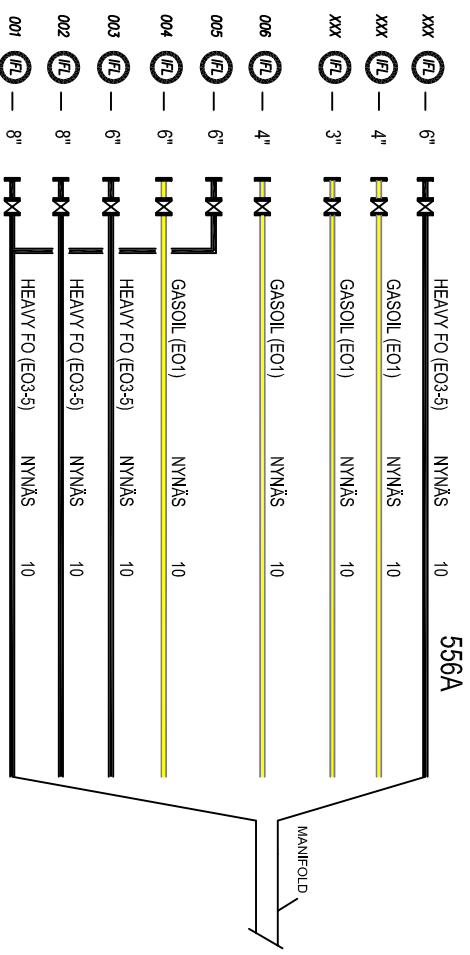


CONNECTIONS:.....HOSE BOLTED FLANGES (DIN)
 MAXIMUM 2 HOSES TO BE USED PER SHIP / SHORE CONNECTION
 BUNKERS:.....BY BARGE
 FRESH WATER:.....BY BARGE



6		MV	2011-03-18
REVISION NO		SIGN	REVISION DATE
MANIFOLD ARRANGEMENT SKARVIK BERTH 556A			
ORIGIN DATE	07-03-27	DRAWN	MVA
SCALE		DRAWING NO 7-45550A	

MAX DRAUGHT: 7.3 M
 MAX LOA: 110 M
 UKC: ...0.5 M

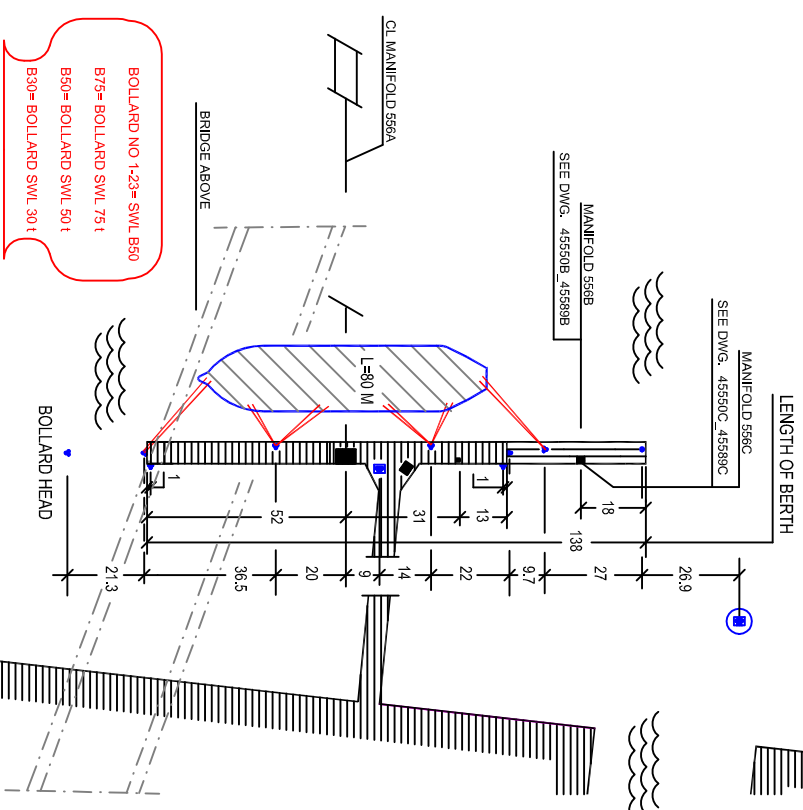

PRIOR LOADING:
 DECLARATION OF PREVIOUS CARGO TO BE DONE BEFORE ENTERING PORT OF GÖTEBORG.
 MAXIMUM ALLOWABLE CONCENTRATION OF H2S IS 50 PPM AND FOR MERCAPTAN THE MAXIMUM ALLOWABLE CONCENTRATION IS 0.5 PPM IN TANK ATMOSPHERE.



5		MV	2011-03-18
REVISION NO		SIGN	REVISION DATE
RECOMMENDED MINIMUM MOORINGARRANGEMENT SKARVIK BERTH 556A			
ORIGIN DATE	07-04-13	DRAWN	MVA
SCALE		DRAWING NO 79-45589A	

PORT OF GÖTEBORG



PORT OF GÖTEBORG

